(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization International Bureau



10/50664

(43) International Publication Date 12 September 2003 (12.09.2003)

PCT

(10) International Publication Number WO 03/073936 A2

(51) International Patent Classification7:

A61B 5/15

(21) International Application Number: PCT/PL03/00019

(22) International Filing Date: 5 March 2003 (05.03.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:

WO 03/073936 A2

 P.352649
 6 March 2002 (06.03.2002)
 PL

 P.352660
 7 March 2002 (07.03.2002)
 PL

 P.352962
 22 March 2002 (22.03.2002)
 PI.


 P.355740
 28 August 2002 (28.08.2002)
 PL

(71) Applicant (for all designated States except US): "HTL STREFA" SP. Z O.O. [PL/PL]; ul. Adamówck 7, PL-95-035 Ozorków (PL). (72) Inventors; and

- (75) Inventors/Applicants (for US only): CZERNECKI, Andrzej [PL/PL]; ul. Zakopianska 10, PL-03-934 Warszawa (PL). WYSZOGRODZKI, Wojciech [PL/PL]; ul. Ostródzka 56 X, PL-03-289 Warszawa (PL). SARNA, Wojciech [PL/PL]; ul. Walbrzyska 19 m. 32, PL-02-739 Warszawa (PL).
- (81) Designated States (national): AE. AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE. ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA; ZM, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: A DEVICE FOR PUNCTURING PATIENT'S SKIN

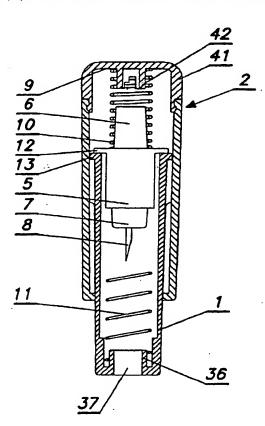

(57) Abstract: The device for puncturing comprises a sleeve (1), a push element (2) mounted on one end of the sleeve (1), a piston (5) with a puncturing tip (8) slidably mounted inside the sleeve (1), and a drive spring (10) positioned between a face (9) of the push element (2) and the piston (5), wherein the push element (2) comprises turnably mounted thereto a setting element (41) of the patient's skin piercing force having inwardly directed stair shaped members (42, 43) pressing the push rod (6) of the piston (5) in operation.